

OUTDOOR LED PAR LIGHTS





NEW

OUTDOOR LED PAR LIGHTS | **ICON**
PROLIGHTING


P022-COB

60W COB RGBW TW LED Par IP65

- Product Type: Outdoor Par Light
- Voltage: AC110-240V/50-60Hz
- Power consumption:90W
- Light source: 60W RGBW+WARM WHITE 5in1 LEDs
- DMX Channel: 7CH/9CH/11CH
- Control Mode: Auto-run,Master/Slave,Sound-Active, DMX 512
- Program: marco color, static color,color fade, color jump, color pulse,memory function
- Electronic Dimming:0-100% linear dimmer
- LED Lifespan: 100,000 hours life expectancy
- Beam angle: 15°/25°/30°/45°for optional
- Electronic Dimming:0-100% linear dimmer
- Indicators: OLED touch screen
- IP 65 DMX In/Out:3-pin Screable connectors
- IP 65 Power in/out: 3-pin Screable connector
- Housing case: die cast Aluminum
- Working temperature:-25 °C ~+35 °C
- Protection class IP: IP 65
- Dimensions (without bracket):201x198x237mm
- Weight: 3.5 kg
- Carton size: 311x271x261mm(1in1) 850x340x550mm(6in1)

FOR MORE INFORMATION AND ACCESSORIES
PLEASE SCAN THE QR-CODES

P022 COB

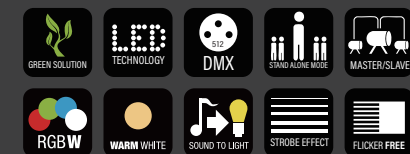



NEW

OUTDOOR LED PAR LIGHTS | **ICON**
PROLIGHTING


P022-7

7×15W RGBWA+UV LED Par IP65

- Product Type: Outdoor Par Light
- Voltage: AC110-240V/50-60Hz
- Power consumption:120W
- Light source: 7x15W RGBWA+UV 6in1LEDs
- DMX Channel: 6CH/8CH/10CH
- Control Mode: Auto-run,Master/Slave,Sound-Active, DMX 512
- Program: marco color, static color,color fade, color jump, color pulse,memory function
- Electronic Dimming:0-100% linear dimmer
- LED Lifespan: 100,000 hours life expectancy
- Beam angle: 15°/25°/30°/45°for optional
- Electronic Dimming:0-100% linear dimmer
- Indicators: OLED touch screen
- IP 65 DMX In/Out:3-pin Screable connectors
- IP 65 Power in/out: 3-pin Screable connector
- Housing case: die cast Aluminum
- Working temperature:-25 °C ~+35 °C
- Protection class IP: IP 65
- Dimensions (without bracket):201x198x237mm
- Weight: 3.5 kg
- Carton size: 311x271x261mm(1in1) 850x340x550mm(6in1)

FOR MORE INFORMATION AND ACCESSORIES
PLEASE SCAN THE QR-CODES

P022-7

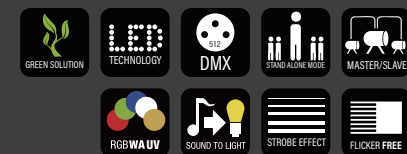



IP65




P072A

9×15W RGBWA+UV 6IN1 LED Par IP65

- Type: Outdoor par light
- Voltage: AC90-240v,50/60Hz
- Power consumption: 168watt
- Light source: 9×15watt RGBWA+UV 6in1 LED
- Beam angle: 25°/30°/45° for option
- DMX Channel: 6ch/10ch/54ch
- Control mode: dmx mode, master/slave, sound-active, auto run
- Program: single pixel, marco color, static color, color fade, color jump, color pulse, memory function
- Electronic Dimming: 0-100% linear dimmer
- LED Lifespan: 100,000 hours life expectancy
- Indicators: OLED touch screen
- IP 65 DMX In/Out: 3-pin seetronic
- XLR connectors
- IP 65 Power in/out: 3-pin seetronic powercon connector
- Waterproof rate: IP65
- Housing material: die cast aluminum
- Working temperature: -25°C~+35°C
- Dimensions: 255×246×159.5mm
- Net weight: 6kg
- Carton size: 460×290×680mm(4in1)

FOR MORE INFORMATION AND ACCESSORIES
PLEASE SCAN THE QR-CODES

P072A

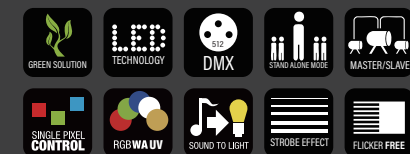



IP65




P072B

9×15W RGBWA+UV 6IN1 Pixel LED Par IP65

- Type: Outdoor par light
- Voltage: AC90-240v,50/60Hz
- Power consumption: 168watt
- Light source: 9×15watt RGBWA+UV 6in1 LED
- Beam angle: 25°/30°/45° for option
- DMX Channel: 6ch/10ch/54ch
- Control mode: dmx mode, master/slave, sound-active, auto run
- Program: single pixel, marco color, static color, color fade, color jump, color pulse, memory function
- Electronic Dimming: 0-100% linear dimmer
- LED Lifespan: 100,000 hours life expectancy
- Indicators: OLED touch screen
- IP 65 DMX In/Out: 3-pin seetronic
- XLR connectors
- IP 65 Power in/out: 3-pin seetronic powercon connector
- Waterproof rate: IP65
- Housing material: die cast aluminum
- Working temperature: -25°C~+35°C
- Dimensions: 255×246×159.5mm
- Net weight: 6kg
- Carton size: 460×290×680mm(4in1)

FOR MORE INFORMATION AND ACCESSORIES
PLEASE SCAN THE QR-CODES

P072B

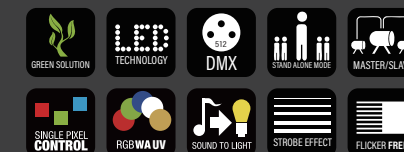




P072C

120W COB LED RGBW 4IN1 LED Par IP65

- Type: Outdoor par light
- Voltage: AC90-240v,50/60Hz
- Power consumption: 150w
- Light source: COB 120W LED RGBW 4in1
- Beam angle: 88°
- DMX Channel: 4CH/8CH
- Control mode: dmx mode, master/slave, sound-active, auto run
- Program: marco color, static color, color fade, color jump, color pulse, memory function
- Electronic Dimming: 0-100% linear dimmer
- LED Lifespan: 100,000 hours life expectancy
- Indicators: OLED touch screen
- IP 65 DMX In/Out: 3-pin seetronic
- XLR connectors
- IP 65 Power in/out: 3-pin seetronic powercon connector
- Waterproof rate: IP65
- Housing material: die cast aluminum
- Working temperature: -25°C~+35°C
- Dimensions: 255×246×159.5mm
- Net weight: 6kg
- Carton size: 460×290×680mm(4in1)

FOR MORE INFORMATION AND ACCESSORIES
PLEASE SCAN THE QR-CODES

P072C

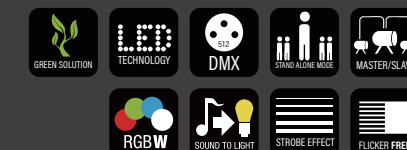




P073A-7

7×15W RGBWA+UV 6IN1 LED Par IP65

- Product Type: Outdoor Par Light
- Voltage: AC110-240V/50-60Hz
- Power consumption: 120W
- Light source: 7×15W RGBWA+UV 6in1 LEDs
- DMX Channel: 6CH/10CH
- Control Mode: Auto-run, Master/Slave, Sound-Active, DMX Mode
- Program: marco color, static color, color fade, color jump, color pulse, memory function
- Electronic Dimming: 0-100% linear dimmer
- LED Lifespan: 100,000 hours life expectancy
- Beam angle: 15°/25°/30°/45° for optional
- Electronic Dimming: 0-100% linear dimmer
- Indicators: OLED touch screen
- IP 65 DMX In/Out: 3-pin XLR seetronic connectors
- IP 65 Power in/out: 3-pin seetronic powercon connector
- Housing case: die cast Aluminum
- Working temperature: -25°C~+35°C
- Protection class IP: IP 65
- Net Weight: 4.5kg
- Carton size: 650×540×380mm(6in1)

FOR MORE INFORMATION AND ACCESSORIES
PLEASE SCAN THE QR-CODES

P073A-7

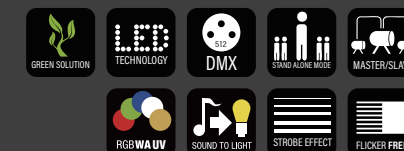




P073B

100W COB RGBW 4IN1 LED Par IP65

- Product Type: Outdoor Par Light
- Voltage: AC110-240V/50-60Hz
- Power consumption: 125W
- Light source: COB 100W RGBW 4in1 LEDs
- DMX Channel: 4CH/8CH
- Control Mode: Auto-run, Master/Slave, Sound-Active, DMX Mode
- Program: marco color, static color, color fade, color jump, color pulse, memory function
- LED Lifespan: 100,000 hours life expectancy
- Beam angle: 60°
- Electronic Dimming: 0-100% linear dimmer
- Indicators: OLED touch screen
- IP 65 DMX In/Out: 3-pin seetronic XLR connectors
- IP 65 Power in/out: 3-pin seetronic powercon connector
- Housing case: die cast Aluminum
- Working temperature: -25°C~+35°C
- Protection class IP: IP 65
- Net Weight: 4.5kg
- Carton size: 650×540×380mm(6in1)

FOR MORE INFORMATION AND ACCESSORIES
PLEASE SCAN THE QR-CODES

P073B

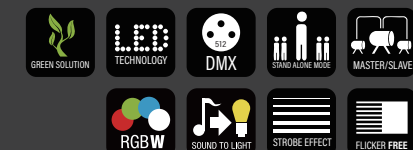




P073C

100W COB TW/CW LED Par IP65

- Product Type: Outdoor Par Light
- Voltage: AC110-240V/50-60Hz
- Power consumption: 120W
- Light source: 100W COB warm white/cool white
- DMX Channel: 3CH
- Control Mode: Auto-run, Master/Slave, Sound-Active, DMX Mode
- Program: marco color, static color, color fade, color jump, color pulse, memory function
- LED Lifespan: 100,000 hours life expectancy
- Beam angle: 60°
- Electronic Dimming: 0-100% linear dimmer
- Indicators: OLED touch screen
- IP 65 DMX In/Out: 3-pin seetronic XLR connectors
- IP 65 Power in/out: 3-pin seetronic powercon connector
- Housing case: die cast aluminum
- Working temperature: -25°C~+35°C
- Protection class IP: IP 65
- Net Weight: 4.5kg
- Carton size: 650×540×380mm(6in1)

FOR MORE INFORMATION AND ACCESSORIES
PLEASE SCAN THE QR-CODES

P073C

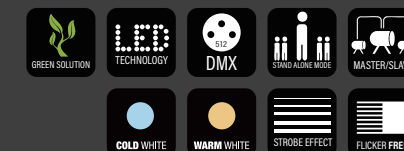



NEW

OUTDOOR LED PAR LIGHTS | **ICON**
PROLIGHTING

P012

MINI 40W RGB LED Spot IP65

- Input Voltage: 100 to 240 VAC, 50/60 Hz
- Power and Current: 45 W
- Light Source: 1 LED (quad-color RGB) 40 W, 50,000 hours life expectancy.
- Installed Optics: 7°Beam Angle w/ filter: 14°Field Angle w/ filter: 27°Beam Angle w/o filter: 9°Field Angle w/o filter: 16°
- Replaceable filter for additional beam angles
- Extremely compact with excellent output
- Variable electronic dimmer (0-100%)
- Double-bracketed yoke doubles as floor stand
- Easy to use OLED digital display
- Built-in auto programs recalled via DMX or Master/Slave
- Power Connection: Edison plug to hard-wiredPower Input: Hard-wiredData Connectors: 3-pin XLR DMX input and output cable whips Cable Length (power): 1.2-1.5 m)
- Control Protocol: DMX,
- DMX Channels: 4/7/11CH
- Dimmer: ElectronicShutter/Strobe: ElectronicStrobe Rate: 0 to 25 HzStandalone
- Color Mixing: Yes Dim Modes: 5Built-in Automated Programs: Yes
- Exterior Color: Black
- Rating: IP65
- Dimensions: 163 x 133 x 100 mm
- Weight: 1.5 kg
- Carton size: 460×840×400mm(10in1)
- Gross Weight: 17 kg

FOR MORE INFORMATION AND ACCESSORIES
PLEASE SCAN THE QR-CODES

P012





IP65




P070A

12×15W RGBWA+UV 6IN1 LED Par IP65

- Voltage: AC90-240V/50-60Hz
- Power consumption: 220W
- Light source: 12×15 RGBWA UV(6IN1)
- Beam Angle: 15°/25°/45°
- LED Lifespan: 100,000hour
- DMX Channel: 10CH or 6CH
- Operate Mode:Auto-run mode; Master/Slave mode;Sound-Active mode
- DMX controller mode, 6CH and 10CH
- Built-in Effect: Color mixing, Static colors, Color chasing, Color pulse, color jump, Color strobe, Memory function
- Housing case: Die cast aluminum body
- Display: LED digital display
- IP65 DMX in/out: 3pin screwable connector
- IP65 power in/out: screwable connector
- Waterproof rate: IP65
- Weight: 5.5kg
- Carton size: 550×530×320mm(4in1)

P070A

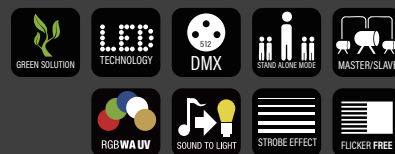

IP65




P064A

54×3W RGBW LED Par IP65

- Power voltage: AC110-240V/50-60Hz
- Power consumption: 200W
- Light source: 54×3W RGBW LEDs (Red12/Green14/Blue14/White14)
- Control Mode: Auto-run, Master/Slave, Sound-Active, DMX Mode
- DMX Channel: 8CH
- Color effect: Color mixing, Static colors, Color chasing, Color pulse, color jump, Color strobe, Memory function
- LED Lifespan: 100,000 hours life expectancy
- Beam angle: 15°/30°/45°/60°
- Electronic Dimming: 0-100% linear dimmer
- Indicators: LED digital display
- IP65 DMX in/out: 3pin screwable connector
- IP65 power in/out: screwable connector
- Housing case: Die cast aluminum body
- Protection class IP: IP 65
- Dimensions: 240×240×335mm
- Weight: 8.5kg
- Carton size: 500×500×360mm(4in1)

P064A

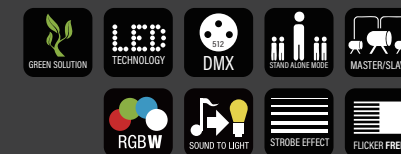




P065B

24×15W RGBWA+UV 6IN1 LED Par IP65

- Power voltage: AC110-240V/50-60Hz
- Power consumption: 400W
- Light source: 24×15W RGBWA UV 6in1 LEDs
- DMX Channel: 6/10CH
- Control Mode: Auto-run, Master/Slave, DMX Mode
- Color effect: Color mixing, Static colors, Color chasing, Color pulse, color jump, Color strobe, Memory function
- LED Lifespan: 60,000 hours life expectancy
- Beam angle: 15°/25°/45°
- Electronic Dimming: 0-100% linear dimmer
- IP65 DMX in/out: 3pin screwable connector
- IP65 power in/out: screwable connector
- Indicator: LED display
- Housing case: Die cast aluminum body
- Protection class IP: IP 65
- Weight: 8.5kg
- Carton size: 580×340×340mm(2in1)

P065B

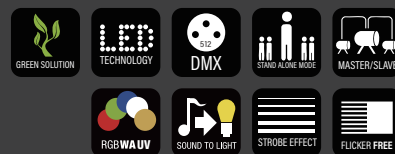


P066B

18×15W RGBWA+UV 6IN1 LED Par IP65

- Power voltage: AC110-240V/50-60Hz
- Power consumption: 400W
- Light source: 18×15W RGBWA+UV 6in1 LEDs, LED Lifespan: 100,000 hours life expectancy
- DMX Channel: 6/10CH
- Control Mode: Auto-run, Master/Slave, Sound-Active, DMX Mode effect: Color mixing, Static colors, Color chasing, Color pulse, color jump, Color strobe, Memory function
- Beam angle: 15°/25°/45°
- Electronic Dimming: 0-100% linear dimmer
- Indicators: LED digital display
- Power connection: IP 65 power cord
- Housing case: Die cast aluminum body
- Protection class IP: IP 65
- Weight: 8.5kg
- Carton size: 840×400×570mm (4in1)

P066B

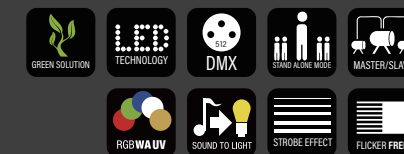



P067

14×10W RGBW 4IN1 LED Par IP65

- Power voltage: AC110-240V/50-60Hz
- Power consumption: 180W
- Light source: 14×10W RGBW 4in1 LEDs
- DMX Channel: 4/8CH
- Control Mode: Auto-run, Master/Slave, DMX Mode
- LED Lifespan: 100,000 hours life expectancy
- Beam angle: 15°/25°/45°
- Electronic Dimming: 0-100% linear dimmer
- Built-in Effect: Color mixing, Static colors, Color chasing, Color pulse, color jump, Color strobe, Memory function
- Indicators: LED digital display
- IP65 DMX in/out: 3pin screwable connector
- IP65 power in/out: screwable connector
- Housing case: Die cast aluminum body
- Protection class IP: IP 65
- Weight: 4.5kg
- Carton size: 720×650×260mm(6in1)

P067




P068

7×15W RGBWA +UV 6IN1 LED Par IP65

- Power voltage: AC110-240V/50-60Hz
- Power consumption: 80W
- Light source: 7×15W RGBWA+UV 6in1 LEDs, LED Lifespan: 100,000 hours life expectancy
- DMX Channel: 6/10CH
- Control Mode: Auto-run, Master/Slave, DMX Mode
- Built-in Effect: Color mixing, Static colors, Color chasing, Color pulse, color jump, Color strobe, Memory function
- Beam angle: 15°/25°/45°
- Electronic Dimming: 0-100% linear dimmer
- Indicators: LED digital display
- IP65 DMX in/out: 3pin screwable connector
- IP65 power in/out: screwable connector
- Housing case: Die cast aluminum body
- Working temperature: -25°C~+35°C
- Protection class IP: IP 65
- Weight: 3.5kg
- Dimensions: 195×230×180mm
- Carton size: 700×580×250mm(6in1)

P068

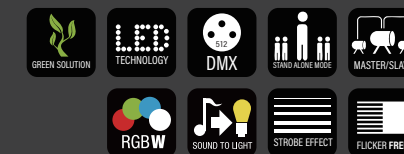




P071

18×15W RGBWA+UV 6IN1 LED Par IP65

- Voltage: AC90-240V/50-60Hz
- Rated Power: 330W
- Light source: 18×15W RGBWA UV 6IN1
- Beam Angle: 15°/25°/30°/45°
- Control Signal: DMX 512, 10CH or 6CH
- Operate Mode: Auto-run mode; Master/Slave mode; Sound-Active mode
- DMX controller mode, 6CH and 10CH
- Built-in Effect: Color mixing, Static colors, Color chasing, Color pulse, color jump, Color strobe, Memory function
- Electronic Dimming: 0-100% linear dimmer
- LED Lifespan: 100,000 hours life expectancy
- IP65 DMX in/out: 3pin screwable connector
- IP65 power in/out: screwable connector
- Display: LED digital display
- Waterproof rate: IP65
- Housing case: Die cast aluminum body
- Net Weight: 8.6kg
- Carton size: 310×300×300mm(1in1)

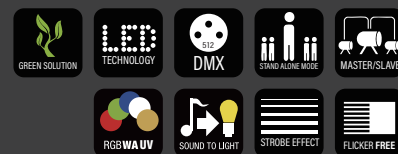

P071



P074

150W COB ZOOM LED Par IP65

- Product Type: Outdoor Par Light
- Voltage: AC100-240V 50/60Hz
- Power Consumption: 220W
- Light source: COB 150W White LED Life time: 50,000 hour
- COB 150W RGBW 4in1 LED
- Zoom angle: 12°-60°
- Controls: DMX512, Sound, Auto, Master/Slave
- DMX Channel: 5/9CH
- Flash: up to 25 times
- Built-in Effect: Color mixing, Static colors, Color chasing, Color pulse, color jump, Color strobe, Memory function
- Control panel: Digital tube display screen
- Dimmer: 0-100% linearly adjustable
- IP65 DMX in/out: 3pin screwable connector
- IP65 power in/out: screwable connector
- Indicator: LED display
- Protection rate: Ip65
- Working environment: -20°C-40°C
- Weight: 10kg
- Carton size: 610×320×480mm(2in1)



P074





IP65

J



P075

18×18W RGBWA+UV 6IN1 ZOOM LED Par IP65

- Product type: Outdoor par light
- Input voltage: AC100V-264V/47-63Hz
- Consumption: 350W
- Light source: 18×18W RGBWA UV 6IN1
- Lifespan: 50,000hours
- DMX Channel: 7CH/11CH
- Driving current: 700mA
- Control Signal: DMX512
- Control mode: Stand alone, master/slave, auto run.
- Built-in Effect: Color mixing, Static colors, Color chasing, Color pulse, color jump, Color strobe, Memory function
- Zoom range: 10°-40°
- Cooling mode: Natural Convection, built-in temperature control
- IP65 DMX in/out: 3pin screwable connector
- IP65 power in/out: screwable connector
- Indicator: LED display
- Protect rate: IP 65
- Net Weight: 11.5 Kg
- Carton size: 550×280×440mm(2in1)

P075



IP65

J



P076

15×15W RGBW 4IN1 ZOOM LED Par IP65

- Product type: Outdoor par light
- Input voltage: AC100V-240V/50-60Hz
- Consumption: 250W
- Light source: 15×15W RGBW Osram 4in1 LED
- Lifespan: 50,000hours
- Beam Angle: 10°-40°
- Driving current: 700mA
- Control Signal: DMX512
- Control mode: Stand alone, master/slaver, DMX mode, Sound actived
- Built-in Effect: Color mixing, Static colors, Color chasing, Color pulse, color jump, Color strobe, Memory function
- DMX Channel: 5CH/9CH
- Cooling mode: Natural Convection, built-in temperature control
- IP65 DMX in/out: 3pin screwable connector
- IP65 power in/out: screwable connector
- Indicator: LED display
- Protect rate: IP 65
- Dimensions: 325×265×330mm

P076





INDOOR LED PAR LIGHTS



P008

100W CW/TW/RGBW 4IN1 Flat COB LED Par

- Product Type: Indoor Flat Par Light
- Power supply: AC110-240V/50-60Hz
- Power consumption: 125W
- Light source: 1×100W CW/WW/RGBW 4in1 COB LED
- Beam Angle: 110°
- DMX Channel: 1/2CH; 4/8CH
- Control Mode: Auto-run, Master/Slave, Sound-Active, DMX Mode
- Ultra violet wavelength: 395nm
- LED Lifespan: 500,000 hours
- Electronic Dimming: 0-100% linear dimmer
- Strobe: variable strobe
- Indicators: LED display
- DMX In/Out: 3-pin XLR connectors
- Power connector: IEC power input/output
- Housing case: Aluminum Alloy
- Protection class IP: IP 20
- Weight: 3.5kg
- Carton size: 284×248×150mm(1in1)



P010A

150W RGBA 4IN1 COB LED Par

- Product Type: Indoor Led Par Light
- Power supply: AC110-240V/50-60Hz
- Power consumption: 150w
- Light source: COB 150W RGB A(amber)4IN1 LED
- Beam Angle: 60°
- DMX Channels: 4/8CH
- Control Mode: Auto-run, Master/Slave, Sound-Active, DMX Mode
- LED Lifespan: 500,000 hours
- Electronic Dimming: 0-100% linear dimmer
- Strobe: Variable strobe
- Indicators: LED digital display
- Power connector: powerCON in/out, fuse DMX In/Out: 3-pin XLR connectors
- Housing case: Aluminum alloy body
- Protection class IP: IP 20
- Dimensions: 230×218×268mm
- Weight: 4.5kg
- Carton size: 560×820×380mm(6in1)
- Gross Weight: 29 kg

P008



P010A







P029

4×50W TW/CW LED Par

- Product Type: Indoor Par Light
- Power supply: AC110-240V/50-60Hz
- Power consumption: 225W
- Light source: 4×50w WW+CW LEDs
- Beam Angle: 25°
- DMX Channel: 4CH/7CH
- Control Mode: Auto-run, Master/Slave, Sound-Active, DMX Mode
- DMX In/Out: 3-pin XLR connectors
- LED Lifespan: 500,000 hours
- Electronic Dimming: 0-100%
- linear dimmer
- Strobe: Variable strobe
- Indicators: LED digital display
- Power connector: PowerCON in/out
- DMX: XLR 3PIN in/out
- Housing case: Aluminum alloy body
- Protection class IP: IP 20
- Dimensions: 250×250×370mm
- Weight: 4.5kg
- Carton size: 560×410×410mm(4in1)

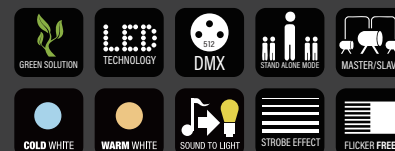

P029

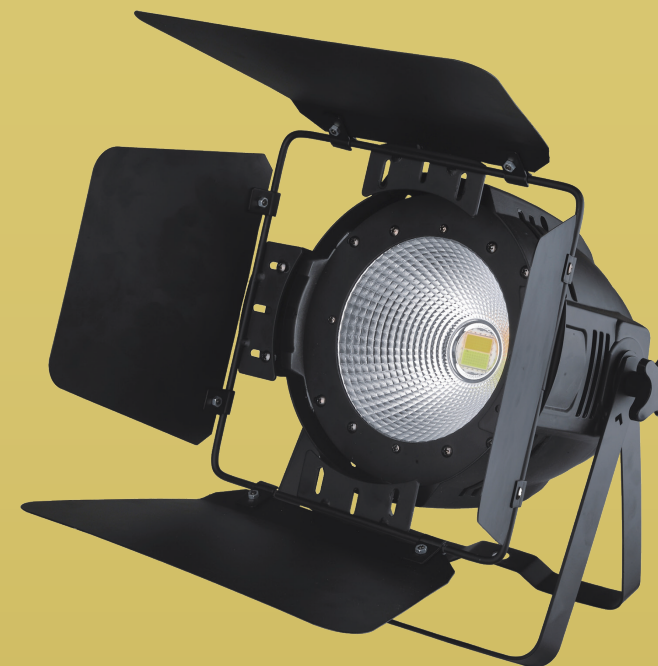

P030C

150W CW/TW/RGBW 4IN1 COB LED Par

- Product Type: Indoor Par Light
- Power supply: AC110-240V/50-60Hz
- Power consumption: 180W
- Light source: 150W TW/CW/RGBW 4in1 COB LED
- Beam Angle: 60°
- DMX Channel: 4CH/8CH
- Control Mode: Auto-run, Master/Slave, Sound-Active, DMX Mode
- LED Lifespan: 500,000 hours
- Electronic Dimming: 0-100% linear dimmer
- Strobe: Variable strobe, Color mixing, Static colors, Color chasing, Color pulse, color jump, Color strobe, Memory function
- Indicators: LED digital display
- Power connector: Power cord
- DMX: XLR 3PIN in/out
- Housing case: Aluminum alloy body
- Protection class IP: IP 20
- Dimensions: 250×250×370mm
- Weight: 4.5kg
- Carton size: 560×410×410mm(4in1)



P030C





P031C

18×10W RGBW 4IN1 LED Par

- Product Type: Indoor Par Light
- Power supply: AC110-240V/50-60Hz
- Power consumption: 225W
- Light source: 18×10w RGBW 4in1 LED
- Beam Angle: 15°/25°/30°/45°
- DMX Channel: 4CH/8CH
- Control Mode: Auto-run, Master/Slave, Sound-Active, DMX Mode
- LED Lifespan: 500,000 hours
- Electronic Dimming: 0-100% linear dimmer
- Strobe: Variable strobe, Color mixing, Static colors, Color chasing, Color pulse, color jump, Color strobe, Memory function
- Indicators: LED digital display
- Power connector: Power cord
- DMX: XLR 3PIN in/out
- Housing case: Aluminum alloy body
- Protection class IP: IP 20
- Dimensions: 250×250×370mm
- Weight: 4.5kg
- Carton size: 560×410×410mm(4in1)




P031D


18×15W RGBWA+UV 6IN1 LED Par

- Product Type: Indoor Par Light
- Power supply: AC110-240V/50-60Hz
- Power consumption: 225W
- Light source: 18×15w RGBWA+UV 6in1 LED
- Beam Angle: 15°/25°/30°/45°
- DMX Channel: 6CH/10CH
- Control Mode: Auto-run, Master/Slave, Sound-Active, DMX Mode
- LED Lifespan: 500,000 hours
- Electronic Dimming: 0-100% linear dimmer
- Strobe: Variable strobe, Color mixing, Static colors, Color chasing, Color pulse, color jump, Color strobe, Memory function
- Indicators: LED digital display
- Power connector: Power cord
- DMX: XLR 3PIN in/out
- Housing case: Aluminum alloy body
- Protection class IP: IP 20
- Dimensions: 250×250×370mm
- Weight: 4.5kg
- Carton size: 560×410×410mm(4in1)

P031C

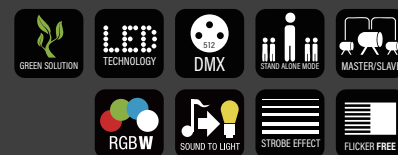

P031D

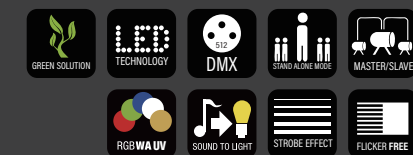

P031E

18×18W RGBWA+UV 6IN1 Zoom LED Par



- Product Type: Indoor zoom par light
- Power supply: AC110-240V/50-60Hz
- Power consumption: 350W
- Light source: 18×18W RGBWA UV 6in1 LED
- Zoom range: 6°~120°
- DMX Channel: 7CH/11CH
- Control Mode: Auto-run, Master/Slave, Sound-Active, DMX Mode
- LED Lifespan: 100,000 hours
- Electronic Dimming: 0-100% linear dimmer
- Beam angle: 25°
- Color effect: Color mixing, Static colors, Color chasing, Color pulse, color jump, Color strobe, Memory function
- Indicators: LED digital display
- Power connector: powercord
- DMX In/Out: 3-pin XLR connectors
- Housing case: Aluminum alloy body
- Protection class IP: IP 20
- Dimensions: 250×250×370mm
- Weight: 4.5kg
- Carton size: 560×410×410mm(4in1)



P049

18×10W 4IN1 RGBW Flat LED Par

- Product Type: Indoor LED par light
- Voltage: AC90-240V/50-60Hz
- Power consumption: 200W
- Light source: 18×10w 4in1 RGBW
- Operate Mode: Auto-run ; Master/Slave; Sound-Active ,DMX512
- DMX Channel: 4CH/8CH
- Beam Angle: 15°/25°/30°/45°
- Color effect: Color mixing, Static colors, Color chasing, Color pulse, color jump, Color strobe, Memory function
- LED digital display
- Power connector: powerCON in/out
- DMX In/Out: 3-pin XLR connectors
- Waterproof rate: IP20
- Housing case: Die cast aluminum body
- Net weight: 4.9kg
- Gross Weight: 5.5kg

P031E



P049

